


www.furnotel.cn

NEW Line Furnotel X Series Refrigeration



Vegavi.cn



Professional Commercial

REFRIGERATION EQUIPMENT



Furnotel[®]

China Head Office

Email: info@furnotel.cn Tel: +86 20 34709971
Fax: +86 20 34709972 Web: www.furnotel.cn
Add: 301/303 No.1 Headquarters Center Tian An Hi-Tech Ecological Park,
Panyu Avenue, Guangzhou, China

Dubai Shinobal Horeca Mart

Email: info@shinobal.com Tel: +971 48818889
Web: www.shinobal.com
Add: Showroom No. 2 & 15, Street 3, Community 598, Dubai Investment Park 1,
Dubai, UAE

This information has been carefully checked to be accurate. Guangzhou Shinelong Kitchen Equipment Co.,Ltd. reserves the right to change product designs and specifications are subject to change without notice. Guangzhou Shinelong Kitchen Equipment Co.,Ltd. has the appearance of the product of the album patents, unauthorized use of the reserve liability.

Furnotel[®]
www.furnotel.cn

Refrigeration Equipment

Quality Equipment for professional

Furnotel®

You select the ingredients,
Furnotel keeps its freshness.

The exclusive Furnotel refrigeration technology for any professional requirements.




Chiller and Freezer

Made of quality stainless steel 304, Furnotel Refrigerators & Chillers own the perfect appearance. 70mm thickness high density foam insulation provides excellent thermal insulation performance. Using Dixell Thermostat, high standard in the industry, accurate and exact temperature control, long service time. All with LED light, automatically lights up when door opening.



Rounded Inside Corners

When designing the interior of the machine, Furnotel Chillers and Freezers always seek to a balance between beautiful appearance and convenience for users. Round corners in the compartment is very easy for cleaning.




Air Cooling System

Well punching processing without burrs, gives elegant appearance and ideal ventilation effect. The fan work along with the compressor's on and off, when reach the setting temperature will come into energy saving status.



Independent Cassette Unit

The independent cassette unit increase the body's versatility and to facilitate the after-sales maintenance.



EBM Fan

Fan cooling type, EBM fan imported from Germany to provide long service life.



Dixell Thermostat

Using Dixell Thermostat, high standard in the industry, accurate and exact temperature control, long service time than others.



The Machine Body

Whole product is welding-free design, which can avoid welding and polishing do harm to rust resistance of stainless steel.



Feet/Castors

Stainless steel feet or castors (adjustable feet can change the height over uneven ground, quality castors for easy moving).



Interior

Round corners in the compartment are easy for cleaning. Adjustable shelves can support up to 30 KG.



Door

Special foaming on glass door, with no welding and combining stainless steel door frame. Self-closing against door's failure to close entirely.



Chiller and freezer



FRCF-1-1 FRCF-1-2



FRCF-2-1 FRCF-2-2



FRCF-4-1 FRCF-4-2



FRCF-5-1 FRCF-5-2



FRCF-5-3

	FRCF-1-1	FRCF-1-2	FRCF-2-1	FRCF-2-2	FRCF-4-1	FRCF-4-2	FRCF-5-1	FRCF-5-2	FRCF-5-3
	1 Door Fancooling Upright Chiller	1 Door Fancooling Upright Freezer	2 Doors Fancooling Upright Chiller	2 Doors Fancooling Upright Freezer	2 Doors Fancooling Upright Chiller	2 Doors Fancooling Upright Freezer	4 Doors Fancooling Upright Chiller	4 Doors Fancooling Upright Freezer	4 Doors Fancooling Double Temperature Upright Freezer
Dimension	740 x 828 x 2050mm	740 x 828 x 2050mm	740 x 828 x 2050mm	740 x 828 x 2050mm	1480 x 828 x 2050mm	1480 x 828 x 2050mm	1480 x 828 x 2050mm	1480 x 828 x 2050mm	1480 x 828 x 2050mm
Capacity	650L	650L	650L	650L	1350L	1350L	1350L	1350L	1350L
Power	523W	625W	533W	645W	727W	1074W	747W	1104W	1158W
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Compressor	Secop	Embraco	Secop	Embraco	Secop	Embraco	Secop	Embraco	Embraco
Fan	EBM	/	EBM	/	EBM	/	EBM	/	/
Refrigerant	R134a	R404a	R134a	R404a	R134a	R404a	R134a	R404a	R134a, R404a
Temperature Range	0°C ~ 8°C	-18°C ~ -22°C	0°C ~ 8°C	-18°C ~ -22°C	0°C ~ 8°C	-18°C ~ -22°C	0°C ~ 8°C	-18°C ~ -22°C	0°C ~ 8°C, -18°C ~ -22°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	3	3	3	3	6	6	6	6	6
Net Weight	115KG	125KG	116KG	126KG	191KG	202KG	193KG	204KG	224KG
Gross Weight	129KG	138KG	130KG	139KG	215KG	226KG	217KG	228KG	254KG
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304
Thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
	*High Density Foam Insulation Thickness: 70mm *With LED Light				*High Density Foam Insulation Thickness: 70mm *With LED Light				

Chiller and Freezer



FRCF-3-1 FRCF-3-2



FRCF-3-3



FRCF-6-1 FRCF-6-2



FRCF-6-3

FRCF-3-1

1 Glass Door Fancooling Upright Chiller

Dimension
Capacity
Power
Voltage
Compressor
Fan
Refrigerant
Temperature Range
Cooling Type
Shelves
Net Weight
Gross Weight
Material
Thermostat

740 x 828 x 2050mm
650L
553W
220-240V~50/60Hz
Secop
EBM
R134a
3°C ~ 10°C
Ventilated
3
124KG
138KG
Stainless Steel 304
Dixell

FRCF-3-2

1 Glass Door Fancooling Upright Freezer

740 x 828 x 2050mm
650L
655W
220-240V~50/60Hz
Embraco
/
R404a
-15°C ~ -20°C
Ventilated
3
124KG
138KG
Stainless Steel 304
Dixell

FRCF-3-3

2 Glass Door Fancooling Upright Chiller

740 x 828 x 2050mm
650L
573W
220-240V~50/60Hz
Secop
EBM
R134a
3°C ~ 10°C
Ventilated
3
128KG
142KG
Stainless Steel 304
Dixell

FRCF-6-1

2 Glass Doors Fancooling Upright Chiller

1480 x 828 x 2050mm
1350L
777W
220-240V~50/60Hz
Secop
EBM
R134a
3°C ~ 10°C
Ventilated
6
208KG
232KG
Stainless Steel 304
Dixell

FRCF-6-2

2 Glass Doors Fancooling Upright Freezer

1480 x 828 x 2050mm
1350L
1134W
220-240V~50/60Hz
Embraco
/
R404a
-15°C ~ -20°C
Ventilated
6
219KG
243KG
Stainless Steel 304
Dixell

FRCF-6-3

4 Glass Doors Fancooling Upright Chiller

1480 x 828 x 2050mm
1350L
797W
220-240V~50/60Hz
Secop
EBM
R134a
3°C ~ 10°C
Ventilated
6
212KG
236KG
Stainless Steel 304
Dixell

*High Density Foam Insulation Thickness: 70mm *With LED Light

*High Density Foam Insulation Thickness: 70mm *With LED Light

Undercounter Chiller and Freezer

NEW Line Furnotel Evolution Refrigeration

- Stainless steel Exterior / Interior
- Insulation with ecological polyurethane 60 mm
- Rounded inside corners
- Self-closing door under 90°
- Height adjustable stainless steel feet
- Plastic-coated shelves, support up to 30kg




Compressor

Perfect system configuration with international branded compressor.



Punched Air Vents

Punched air vents to strengthen the ventilation cooling.



Quality Material

Stainless steel Exterior / Interior



Adjustable Feet/Castors optional

Stainless steel feet or castors (adjustable feet to change the height of feet over uneven ground, quality castors for easy moving.)



Self-closing Doors

Self-closing doors with magnetic gaskets.



Non-welding Design

The non-welding design to prevent the rust of stainless steel.



Sturdy Construction

Sturdy stainless steel construction, all spare parts with RoHS certification.



2/3/4 doors, or with drawers

The glass door and the foaming doors for freezer or chiller are completely replaceable to increase the versatility of body and spare parts.



Technical Innovation

Undercounter Chillers and Freezers

Furnotel®



The whole machine, can be customized according to the client's requirement. Doors number, or variety combinations by doors and drawers can be changed based on the storing food.



- A. Self-closing doors with magnetic gaskets, remain motionless when it open in angles greater than 90 degrees.
- B. Plastic-coated shelves, support up to 30kg.
- C. The replaceable door heating line, easily solve the after-sales problem.
- D. Completely automatic defrosting and condense water evaporation.
- E. Using digital thermostat, accurate and exact temperature control.

Special foaming on glass door, with no welding and combining stainless steel door frame. Completely replaceable to increase the versatility of body and spare parts. Self-closing against door's failure to close entirely.



Features

- All-out drawers, facilitate to pull-out of drawers, easy for storing food
- COMPEX guide way from Italy, all spare parts with RoHS certification
- Perfect interior design, insure circulation of cold air, keep freshness
- Ventilated cooling type, EBM fan imported from Germany to provide long service life
- Imported compressor(Embraco or Secop)
- Fully removable refrigeration unit-cassette



Perfectly uniform temperature
High efficiency air flow distribution.



Undercounter Chiller and Freezer



FRUC-1-1
FRUC-1-2



FRUC-1-1

2 Doors Fancooling Undercounter Chiller

FRUC-1-2

2 Doors Fancooling Undercounter Freezer



FRUC-2-1
FRUC-2-2



FRUC-2-1


3 Doors Fancooling Undercounter Chiller

FRUC-2-2

3 Doors Fancooling Undercounter Freezer



FRUC-3-1
FRUC-3-2



FRUC-3-1

4 Doors Fancooling Undercounter Chiller

FRUC-3-2

4 Doors Fancooling Undercounter Freezer

Dimension	1360 x 700 x 855mm	1360 x 700 x 855mm	1810 x 700 x 855mm	1810 x 700 x 855mm	2263x 700 x 855mm	2263x 700 x 855mm
Capacity	270L	270L	417L	417L	566L	566L
Power	280W	500W	310W	520W	350W	680W
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R404a	R134a	R404a	R134a	R404a
Temperature Range	0°C ~ +8°C	-18°C ~ -22°C	0°C ~ +8°C	-18°C ~ -22°C	0°C ~ +8°C	-18°C ~ -22°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	2	2	3	3	4	4
Net Weight	93KG	100KG	106KG	115KG	125KG	135KG
Gross Weight	98KG	105KG	116KG	125KG	140KG	150KG

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional



FRUC-4-1
FRUC-4-2



FRUC-4-1


2 Doors Fancooling Undercounter Chiller with Backsplash

FRUC-4-2

2 Doors Undercounter Fancooling Freezer with Backsplash



FRUC-5-1
FRUC-5-2

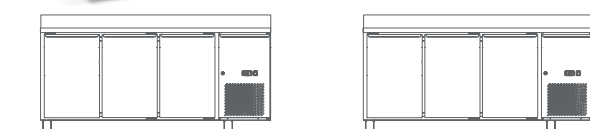

FRUC-5-1


3 Doors Fancooling Undercounter Chiller with Backsplash

FRUC-5-2

3 Doors Fancooling Undercounter Freezer with Backsplash



FRUC-6-1
FRUC-6-2



FRUC-6-1

4 Doors Fancooling Undercounter Chiller with Backsplash

FRUC-6-2

4 Doors Fancooling Undercounter Freezer with Backsplash

Dimension	1360 x 700 x 955mm	1360 x 700 x 955mm	1810 x 700 x 955mm	1810 x 700 x 955mm	2263x 700 x 955mm	2263x 700 x 955mm
Capacity	270L	270L	417L	417L	566L	566L
Power	280W	500W	310W	520W	350W	680W
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R404a	R134a	R404a	R134a	R404a
Temperature Range	0°C ~ +8°C	-18°C ~ -22°C	0°C ~ +8°C	-18°C ~ -22°C	0°C ~ +8°C	-18°C ~ -22°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	2	2	3	3	4	4
Net Weight	95KG	102KG	109KG	118KG	129KG	139KG
Gross Weight	100KG	108KG	121KG	130KG	145KG	155KG

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional


Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional



Undercounter Chiller and Freezer



FRUC-7-1



FRUC-7-1


2 Glass Doors Fancooling Undercounter Chiller

Dimension	1360 x 700 x 855mm
Capacity	270L
Power	280W
Voltage	220-240V~50/60Hz
Compressor	Embraco/Secop
Refrigerant	R134a
Temperature Range	+3°C ~+10°C
Cooling Type	Ventilated
Shelves	2
Net Weight	96KG
Gross Weight	101KG

Digital Thermostat *Feet/Castor: **Optional** Thickness: **60mm** *Drawer is optional



FRUC-7-2



FRUC-7-2


3 Glass Doors Fancooling Undercounter Chiller

Dimension	1810 x 700 x 855mm
Capacity	417L
Power	310W
Voltage	220-240V~50/60Hz
Compressor	Embraco/Secop
Refrigerant	R134a
Temperature Range	+3°C ~+10°C
Cooling Type	Ventilated
Shelves	3
Net Weight	112KG
Gross Weight	122KG

Digital Thermostat *Feet/Castor: **Optional** Thickness: **60mm** *Drawer is optional



FRUC-7-3




FRUC-7-3

4 Glass Doors Fancooling Undercounter Chiller

Dimension	2263 x 700 x 855mm
Capacity	566L
Power	350W
Voltage	220-240V~50/60Hz
Compressor	Embraco/Secop
Refrigerant	R134a
Temperature Range	+3°C ~+10°C
Cooling Type	Ventilated
Shelves	4
Net Weight	132KG
Gross Weight	147KG


Digital Thermostat *Feet/Castor: **Optional** Thickness: **60mm** *Drawer is optional

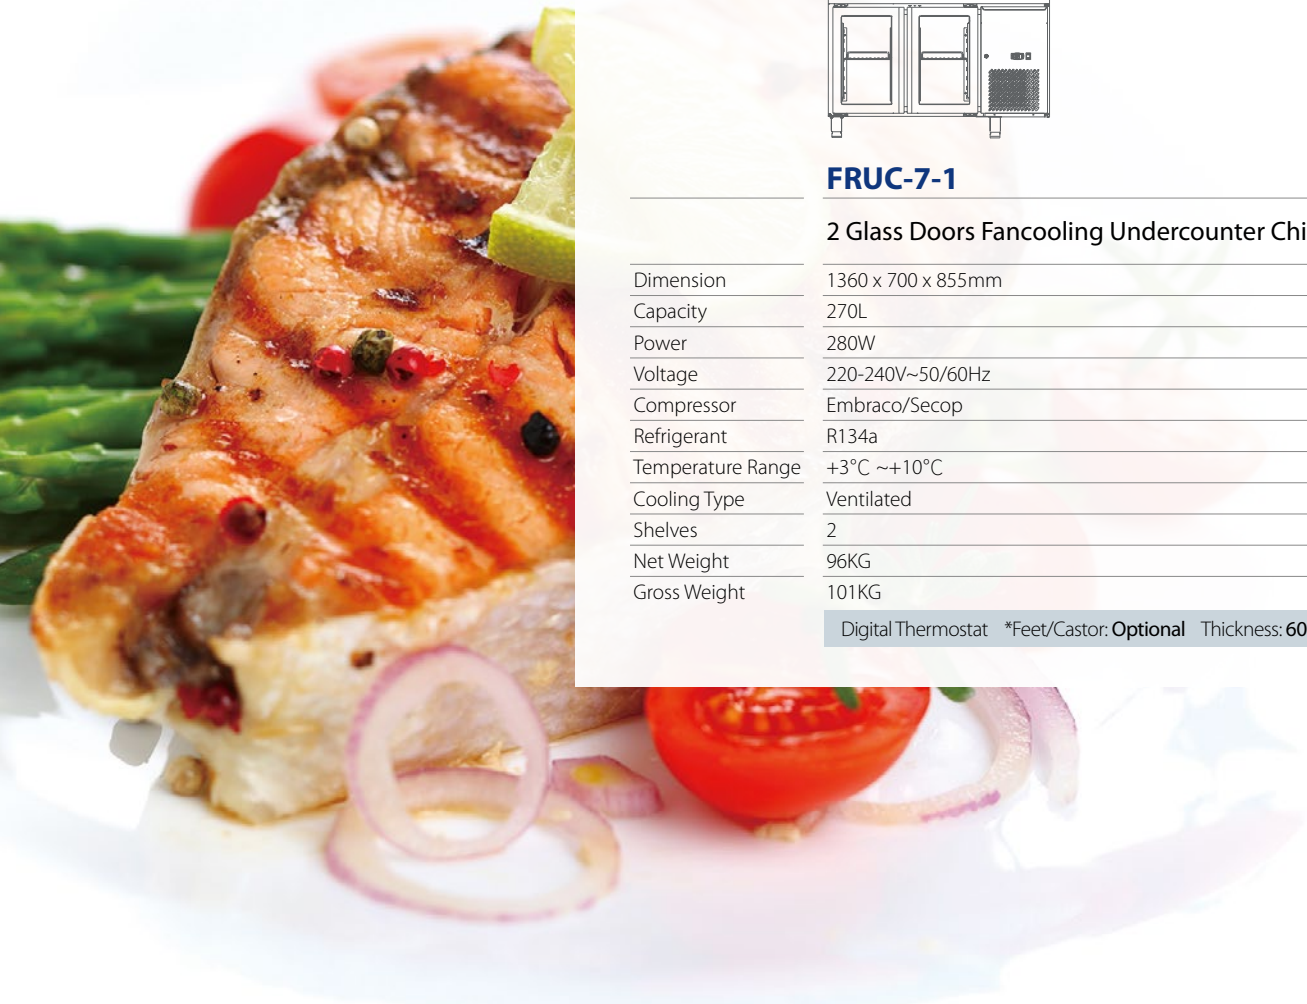

Undercounter Chiller and Freezer



FRUC-8-1




FRUC-8-1

1 Doors 2 Drawers Fancooling Undercounter Chiller

Dimension	1360 x 700 x 855mm	1360 x 700 x 855mm	1360 x 700 x 855mm
Capacity	270L	270L	270L
Power	280W	280W	280W
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Compressor	Embraco / Secop	Embraco / Secop	Embraco / Secop
Refrigerant	R134a	R134a	R134a
Temperature Range	0°C ~ +8°C	0°C ~ +8°C	0°C ~ +8°C
Cooling Type	Ventilated	Ventilated	Ventilated
Shelves	1	1	0
Net Weight	104KG	109KG	115KG
Gross Weight	109KG	114KG	120KG

Digital Thermostat *Feet / Castor: Optional Thickness: 60mm *Drawer is optional


FRUC-8-2



FRUC-8-2

1 Doors 3 Drawers Fancooling Undercounter Chiller


FRUC-8-3



FRUC-8-3

4 Drawers Fancooling Undercounter Chiller


FRUC-8-4



FRUC-8-4

6 Drawers Fancooling Undercounter Chiller


FRUC-8-5



FRUC-8-5

6x1/2 Drawers Fancooling Undercounter Chiller

FRUC-8-6



FRUC-8-6


3x1/3 +4x1/2 Drawers Fancooling Undercounter Chiller

Dimension	1360 x 700 x 855mm	1810 x 700 x 855mm	1810 x 700 x 855mm
Capacity	270L	417L	417L
Power	280W	310W	310W
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R134a	R134a
Temperature Range	0°C ~ +8°C	0°C ~ +8°C	0°C ~ +8°C
Cooling Type	Ventilated	Ventilated	Ventilated
Shelves	0	0	0
Net Weight	125KG	113KG	123KG
Gross Weight	130KG	123KG	133KG

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional




FRUC-8-7



FRUC-8-7

3x1/3 +2x1/2 Drawers Fancooling Undercounter Chiller


FRUC-8-8



FRUC-8-8

4x1/3+2x1/2+1x2/3 Drawers Fancooling Undercounter Chiller

FRUC-8-9



FRUC-8-9


9x1/3 Drawers Fancooling Undercounter Chiller

Dimension	1810x 700 x 855mm	1810x 700 x 855mm	1810x 700 x 855mm
Capacity	417L	417L	417L
Power	310W	310W	310W
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R134a	R134a
Temperature Range	0°C ~ +8°C	0°C ~ +8°C	0°C ~ +8°C
Cooling Type	Ventilated	Ventilated	Ventilated
Shelves	1	0	0
Net Weight	129KG	134KG	134KG
Gross Weight	139KG	144KG	144KG

Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional




FRUC-8-10



FRUC-8-10

3 Doors 2 Drawers Fancooling Undercounter Chiller


FRUC-8-11



FRUC-8-11

2 Doors 4 Drawers Fancooling Undercounter Chiller


FRUC-8-12



FRUC-8-12

2 Doors 5 Drawers Fancooling Undercounter Chiller

FRUC-8-13

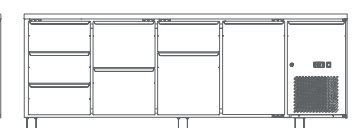

FRUC-8-13

1 Doors 7 Drawers Fancooling Undercounter Chiller

Dimension	2263 x 700 x 855mm	2263 x 700 x 855mm	2263 x 700 x 855mm	2263 x 700 x 855mm
Capacity	566L	566L	566L	566L
Power	350W	350W	350W	350W
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R134a	R134a	R134a
Temperature Range	0°C ~ +8°C	0°C ~ +8°C	0°C ~ +8°C	0°C ~ +8°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	3	2	2	1
Net Weight	135KG	146KG	151KG	162KG
Gross Weight	150KG	161KG	166KG	177KG


Digital Thermostat *Feet/Castor: Optional Thickness: 60mm *Drawer is optional

Refrigeration Prep Station

- Integral stretched stainless steel body
- Insulation with ecological polyurethane 60mm
- Rounded inside corners
- Self-closing doors under 90°
- Height adjustable stainless steel feet
- Plastic-coated shelves, support up to 30kg
- Dixell Thermostat from Italy
- **Cover:** Flat Stainless Steel Cover Series/
Glass Cover Series



Combination

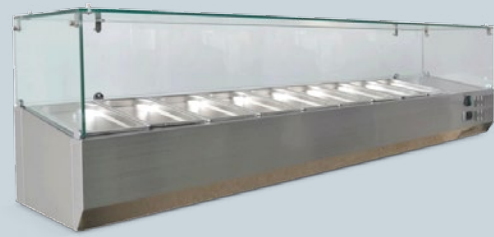

Pan coolers



- Inside/outside body stainless steel
- Ecology friendly HCFC free polyurethane insulation
- Dixell Thermostat from Italy
- Cover: Flat Glass Cover Series/Stainless Steel Cover Series

- Ventilated cooling type, EBM fan imported from Germany to provide long service life
- Using digital thermostat, accurate and exact temperature control
- Stainless steel drawer for a whole Gastronorm Containers
- COMPEX guide way from Italy, all spare parts with RoHS certification
- Completely automatic defrosting and condense water evaporation
- Fully removable refrigeration unit-cassette



FRCR-1-1 FRCR-1-2 FRCR-1-3 FRCR-1-4 FRCR-1-5 FRCR-1-6
FRCR-1-7 FRCR-1-8 FRCR-1-9 FRCR-1-10



FRCR-1-11 FRCR-1-12 FRCR-1-13 FRCR-1-14
FRCR-1-15 FRCR-1-16 FRCR-1-17 FRCR-1-18
FRCR-1-19 FRCR-1-20

Pan coolers



	FRCR-1-1	FRCR-1-2	FRCR-1-3	FRCR-1-4	FRCR-1-5
	1.2m Static Cooling Countertop Display Showcase	1.2m Static Cooling Countertop Display Showcase	1.4m Static Cooling Countertop Display Showcase	1.4m Static Cooling Countertop Display Showcase	1.5m Static Cooling Countertop Display Showcase
Dimension	1200 x 335 x 435mm	1200 x 395 x 435mm	1400 x 335 x 435mm	1400 x 395 x 435mm	1500 x 335 x 435mm
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Power	125W	125W	125W	125W	150W
GN Pan	1/4x5 pcs	1/3x3+1/2x1 pcs	1/4x6 pcs	1/3x6 pcs	1/4x7 pcs
Weight	35KG	38KG	38KG	40KG	40KG
Material	Stainless Steel 304				
	Refrigerant: R134a Temperature Range: 0°C ~ +8°C Compressor: Embraco Thermostat: Dixell *GN pans are not included				



	FRCR-1-6	FRCR-1-7	FRCR-1-8	FRCR-1-9	FRCR-1-10
	1.5m Static Cooling Countertop Display Showcase	1.6m Static Cooling Countertop Display Showcase	1.6m Static Cooling Countertop Display Showcase	1.8m Static Cooling Countertop Display Showcase	1.8m Static Cooling Countertop Display Showcase
Dimension	1500 x 395 x 435mm	1600 x 335 x 435mm	1600 x 395 x 435mm	1800 x 335 x 435mm	1800 x 395 x 435mm
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Power	150W	150W	150W	175W	175W
GN Pan	1/3x5+1/2x1 pcs	1/4x7 pcs	1/3x7 pcs	1/4x9 pcs	1/3x8 pcs
Weight	42KG	41KG	45KG	44KG	47KG
Material	Stainless Steel 304				
	Refrigerant: R134a Temperature Range: 0°C ~ +8°C Compressor: Embraco Thermostat: Dixell *GN pans are not included				



	FRCR-1-11	FRCR-1-12	FRCR-1-13	FRCR-1-14	FRCR-1-15
	1.2m Static Cooling Countertop Display Showcase	1.2m Static Cooling Countertop Display Showcase	1.4m Static Cooling Countertop Display Showcase	1.4m Static Cooling Countertop Display Showcase	1.5m Static Cooling Countertop Display Showcase
Dimension	1200 x 335 x 270mm	1200 x 395 x 270mm	1400 x 335 x 270mm	1400 x 395 x 270mm	1500 x 335 x 270mm
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Power	125W	125W	125W	125W	150W
GN Pan	1/4x5 pcs	1/3x3+1/2x1 pcs	1/4x6 pcs	1/3x6 pcs	1/4x7 pcs
Weight	35KG	38KG	38KG	40KG	40KG
Material	Stainless Steel 304				
	Refrigerant: R134a Temperature Range: 0°C ~ +8°C Compressor: Embraco Thermostat: Dixell *GN pans are not included				



	FRCR-1-16	FRCR-1-17	FRCR-1-18	FRCR-1-19	FRCR-1-20
	1.5m Static Cooling Countertop Display Showcase	1.6m Static Cooling Countertop Display Showcase	1.6m Static Cooling Countertop Display Showcase	1.8m Static Cooling Countertop Display Showcase	1.8m Static Cooling Countertop Display Showcase
Dimension	1500 x 395 x 270mm	1600 x 335 x 270mm	1600 x 395 x 270mm	1800 x 335 x 270mm	1800 x 395 x 270mm
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Power	150W	150W	150W	175W	175W
GN Pan	1/3x5+1/2x1 pcs	1/4x7 pcs	1/3x7 pcs	1/4x9 pcs	1/3x8 pcs
Weight	42KG	41KG	45KG	44KG	47KG
Material	Stainless Steel 304				
	Refrigerant: R134a Temperature Range: 0°C ~ +8°C Compressor: Embraco Thermostat: Dixell *GN pans are not included				

Refrigeration Prep Station




FRCR-3-1
FRCR-3-2
FRCR-3-3
FRCR-3-4

	FRCR-3-1	FRCR-3-2	FRCR-3-3	FRCR-3-4
	2 Doors Fancooling Salad Bar Pre Station	2 Doors Fancooling Salad Bar Pre Station	3 Doors Fancooling Salad Bar Pre Station	3 Doors Fancooling Salad Bar Pre Station
Dimension	1360 x 700 x 1100mm	1500 x 800 x 1100mm	1810 x 700 x 1100mm	2025 x 800 x 1100mm
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Power	300W	300W	320W	320W
Capacity	400 L	460 L	520 L	600 L
Temperature Range	0°C ~ +8°C	0°C ~ +8°C	0°C ~ +8°C	0°C ~ +8°C
Refrigerant	R134a	R134a	R134a	R134a
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Thermostat	Dixell	Dixell	Dixell	Dixell
Shelf Number	2	2	3	3
Net Weight	105KG	115KG	125KG	125KG
Gross Weight	115KG	125KG	135KG	135KG
Material:Stainless Steel 304 *Feet/Castor:Optional Foaming Thickness:60mm				

FRCR-2-1
FRCR-2-2
FRCR-2-3
FRCR-2-4
FRCR-2-5



	FRCR-2-1	FRCR-2-2	FRCR-2-3	FRCR-2-4	FRCR-2-5
	2 Doors Fancooling Pizza Pre Station	2 Doors Fancooling Pizza Pre Station	2 Doors Fancooling Pizza Pre Station	2 Doors 7 Drawers Fancooling Pizza Pre Station	3 Doors Fancooling Pizza Pre Station
Dimension	1360 x 700 x 1030mm	1500 x 800 x 1030mm	1810 x 700 x 1030mm	2025 x 800 x 1030mm	2025 x 800 x 1030mm
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Power	280W	310W	310W	310W	350W
Capacity	270 L	375 L	417 L	375 L	580 L
Temperature Range	0°C ~ +8°C	0°C ~ +8°C	0°C ~ +8°C	0°C ~ +8°C	0°C ~ +8°C
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop
Refrigerant	R134a	R134a	R134a	R134a	R134a
Shelf Number	2	2	2	2	3
Net Weight	135KG	140KG	150KG	170KG	170KG
Gross Weight	145KG	150KG	160KG	180KG	180KG
Cooling System: Ventilated Thermostat: Dixell Material: Stainless Steel 304 *Feet/Castor: Optional Foaming Thickness: 60mm					

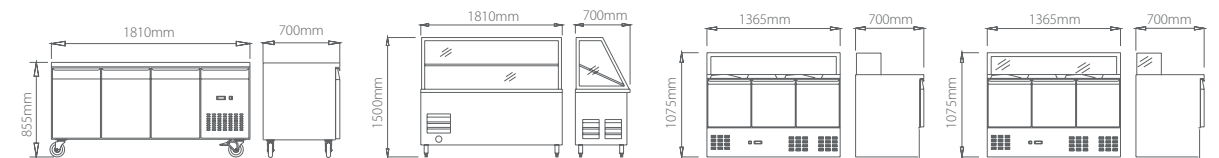

	FRCR-4	FRCR-5	FRCR-6-1	FRCR-6-2
	3 Doors Fancooling Salad Bar Pre Station	3 Doors Fancooling Salad Bar Pre Station	SS304 3 Doors Static Salad Work Bench	SS304 3 Doors Static Salad Work Bench
Dimension	1810 x 700 x 855mm	1810 x 700 x 1500mm	1365 x 700 x 1075mm	1365 x 700 x 1075mm
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220V/50Hz	220V/50Hz
Power	350W	350W	/	/
Capacity	417 L	417 L	/	/
Temperature Range	0°C ~ +8°C	0°C ~ +8°C	+2°C ~ +8°C	+2°C ~ +8°C
Cooling System	Ventilated	Ventilated	/	/
Thermostat	Dixell	Dixell	/	/
Shelf Number	3	3	/	/
Net Weight	120KG	165KG	/	/
Gross Weight	130KG	175KG	/	/
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304
Feet/Castor	Optional	Optional	/	/
Foaming Thickness	60mm	60mm	/	/

*GN 1/1 size for top operation
*Pans are not included

Refrigerant: R134a Compressor: Embraco/Secop Material: Stainless Steel 304

Bar Refrigerator

1. Choice of exterior finishes - PVC coated stainless steel
2. Perfect designed for bar refrigerating, maximum the internal space, giving a professional arrangement of wine and other drinks
3. Double glazed doors and bright, low energy consumption lighting for excellent display and presentation
4. Fully adjustable nylon coated wire shelves to suit stacking requirements and accommodate vertical stacking



Sliding Doors

Steelyard weight sliding door with a long service life
 Integrated foaming structure of the opening part
 Interior mirror face structure
 Embedded anti-water thermostats
 With or without counter-top (no counter-top for embedded installation)

FRBR-1-1
 FRBR-1-2
 FRBR-1-3

	FRBR-1-1	FRBR-1-2	FRBR-1-3	FRBR-2-1	FRBR-2-2	FRBR-2-3
	196L 2 Sliding Doors Fancooling Bar Refrigerator	213L 2 Doors Fancooling Bar Refrigerator	231L 2 Doors Fancooling Bar Refrigerator	304L 3 Sliding Doors Fancooling Bar Refrigerator	331L 3 Doors Fancooling Bar Refrigerator	358L 3 Doors Fancooling Bar Refrigerator
Dimension	900 x 520 x 800mm	900 x 520 x 850mm	900 x 520 x 900mm	1350 x 520 x 800mm	1350 x 520 x 850mm	1350 x 520 x 900mm
Capacity	196L	213L	231L	304L	331L	358L
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Cooling system	Fancooling	Fancooling	Fancooling	Fancooling	Fancooling	Fancooling
Temperature Range	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
Input Power	195W	195W	195W	261W	261W	261W
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop
Thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Door Type	Sliding Doors	Sliding Doors	Sliding Doors	Sliding Doors	Sliding Doors	Sliding Doors
Door No.	2	2	2	3	3	3
Net Weight	68KG	70KG	73KG	93KG	95KG	98KG



Hinged door

Door with return spring
 Independent installed handle
 Interior mirror surface structure
 The embedded anti-water thermostats
 With or without counter-top (no counter-top for embedded installation)

FRBR-4-1
 FRBR-4-2
 FRBR-4-3

	FRBR-3-1	FRBR-3-2	FRBR-3-3	FRBR-4-1	FRBR-4-2	FRBR-4-3	FRBR-5-3	FRBR-5-2	FRBR-5-1
	124L 1 Door Fancooling Bar Refrigerator	135L 1 Door Fancooling Bar Refrigerator	146L 1 Door Fancooling Bar Refrigerator	196L 2 Doors Fancooling Bar Refrigerator	213L 2 Door Fancooling Bar Refrigerator	213L 2 Door Fancooling Bar Refrigerator	304L 3 Doors Fancooling Bar Refrigerator	331L 3 Doors Fancooling Bar Refrigerator	358L 3 Doors Fancooling Bar Refrigerator
Dimension	600 x 520 x 800mm	600 x 520 x 850mm	600 x 520 x 900mm	900 x 520 x 800mm	900 x 520 x 850mm	900 x 520 x 900mm	1350 x 520 x 800mm	1350 x 520 x 850mm	1350 x 520 x 900mm
Capacity	124L	135L	146L	196L	213L	213L	304L	331L	358L
Voltage	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz	220-240V~50/60Hz
Cooling system	Fancooling	Fancooling	Fancooling	Fancooling	Fancooling	Fancooling	Fancooling	Fancooling	Fancooling
Temperature Range	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C	1°C ~ +8°C
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a
Input Power	195W	195W	195W	195W	195W	195W	261W	261W	261W
Compressor	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop	Embraco/Secop
Doors type	Hinged Doors	Hinged Doors	Sliding Doors	Hinged Doors	Hinged Doors	Hinged Doors	Hinged Doors	Hinged Doors	Hinged Doors
Door NO	1	1	1	2	2	2	3	3	3
Thermostat	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell	Dixell
Net Weight	53KG	55KG	60KG	68KG	70KG	73KG	93KG	95KG	98KG

Bar Refrigerator

Available as a one, two or three door model, the Furnotel Bar Refrigerator maintains interior temperature between +1~+8°C or +2~+10°C to ensure drinks are always cool when served.



FRBR-6-1



FRBR-6-2



FRBR-6-3

FRBR-6-1

115L 1 Doors Plastic Fancooling Bar Refrigerator

Dimension	600 x 505 x 900mm
Capacity	115L
Voltage	220V~50Hz
Cooling system	Fancooling
Temperature Range	2°C ~ +10°C
Refrigerant	R134a
Input Power	145W
Compressor	Chinese brand
Thermostat	Chinese brand
Door Type	Hinged door
Door No.	1
Net Weight	50KG

FRBR-6-2

201L 2 Doors Plastic Fancooling Bar Refrigerator

Dimension	920 x 505 x 900mm
Capacity	201L
Voltage	220V~50Hz
Cooling system	Fancooling
Temperature Range	2°C ~ +10°C
Refrigerant	R134a
Input Power	145W
Compressor	Chinese brand
Thermostat	Chinese brand
Door Type	Hinged door
Door No.	2
Net Weight	60KG

FRBR-6-3

303L 3Doors Plastic Fancooling Bar Refrigerator

Dimension	1335 x 505 x 900mm
Capacity	303L
Voltage	220V~50Hz
Cooling system	Fancooling
Temperature Range	2°C ~ +10°C
Refrigerant	R134a
Input Power	210W
Compressor	Chinese brand
Thermostat	Chinese brand
Door Type	Hinged door
Door No.	3
Net Weight	75KG



Refrigeration Equipment

Quality Equipment for professional

Furnotel®

Furnotel Asian Refrigeration

Reasonable size, elegance and performance at your service




Upright Chiller and Freezer

- *Chiller temperature 0~8℃ , freezer -18~-22℃
- *304 stainless steel, 0.8mm material thickness
- *High condense heat insulation door, thickness: 70mm
- *Maximum working temperature can reach 40℃ -43℃
- *Independent cooling unit, easy check and maintenance
- *Good anti-corrosion ability, nickel content 8% ~ 10%
- *Rotary wing type condenser, good corrosion resistance and heat dissipation, working life 6-8 years



Furnotel X Series Refrigeration

Furnotel's new developed products in 2018. Some of core components adopt world brand accessories. Furnotel is committed to increase refrigeration performance and this series is a combination of performance, reliability and elegance, cost-effective.



Quality Material

Using quality material 304 stainless steel, can adapt to the moist environment.



Independent cooling unit

The independent cooling unit increases the body's versatility to facilitate the after-sale maintenance.



Medium Capacity

Reasonable capacity for medium and small-sized restaurant, make full use of storage space.



FREFC-0608A

1 Door Fancooling Upright Chiller

FREFF-0608A

1 Door Fancooling Upright Freezer

FREFC-0608B

2 Doors Fancooling Upright Chiller

FREFF-0608B

2 Doors Fancooling Upright Freezer

	FREFC-0608A	FREFF-0608A	FREFC-0608B	FREFF-0608B
Dimension	610*760*1950mm	610*760*1950mm	610*760*1950mm	610*760*1950mm
Capacity	600L	600L	600L	600L
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Power	300W	700W	300W	700W
Compressor	Embraco	Embraco	Embraco	Embraco
Fan	Weiguang	Weiguang	Weiguang	Weiguang
Refrigerant	R134a	R404A	R134a	R404A
Temperature Range	0℃ ~8℃	-16℃ ~-20℃	0℃ ~8℃	-16℃ ~-20℃
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	3	3	3	3
Net Weight	95kg	102kg	96kg	103kg
Gross Weight	107kg	114kg	108kg	115kg
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304
Thermostat	Carel	Carel	Carel	Carel

*High Density Foam Insulation Thickness 70mm



FREFC-0608C

1 Glass Door Fancooling Upright Chiller

Adjustable shelves

Adjustable shelves can support up to 30 KG.



FREFF-0608C

1 Glass Door Fancooling Upright Freezer

	FREFC-0608C	FREFF-0608C
Dimension	610 x 760 x 1950mm	610*760*1950mm
Capacity	600L	600L
Voltage	220-240V~50Hz	220-240V~50Hz
Power	300W	700W
Compressor	Embraco	Embraco
Fan	Weiguang	Weiguang
Refrigerant	R134a	R404A
Temperature Range	3℃ ~10℃	-15℃ ~-18℃
Cooling Type	Ventilated	Ventilated
Shelves	3	3
Net Weight	104kg	111kg
Gross Weight	116kg	123kg
Material	Stainless Steel 304	Stainless Steel 304
Thermostat	Carel	Carel

*High Density Foam Insulation Thickness 70mm *With LED Light

Asian Series

Upright Chiller and Freezer

The glass door allows you to easily see the inside, the heater can effectively to prevent condensation on glass.



FREFF-1208A

FREFF-1208A

FREFF-1208C

FREFF-1208C

2 Doors Fancooling Upright Chiller

2 Doors Fancooling Upright Freezer

2 Glass Doors Fancooling Upright Chiller

2 Glass Doors Fancooling Upright Freezer

Dimension	1220*760*1950mm	1220*760*1950mm	1220*760*1950mm	1220*760*1950mm
Capacity	1200L	1200L	1200L	1200L
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Power	550W	1000W	550W	1000W
Compressor	Embraco	Embraco	Embraco	Embraco
Fan	Weiguang	Weiguang	Weiguang	Weiguang
Refrigerant	R134a	R404A	R134a	R404A
Temperature Range	0°C ~8°C	-16°C ~-20°C	3°C ~10°C	-15°C ~-18°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	6	6	6	6
Net Weight	145kg	156kg	162kg	173kg
Gross Weight	160kg	172kg	177kg	189kg
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304
Thermostat	Carel	Carel	Carel	Carel

*High Density Foam Insulation Thickness 70mm

*High Density Foam Insulation Thickness 70mm *With LED Light



- *Stainless steel exterior/interior
- *Stainless steel feet/ castors
- *Rounded inside corners
- *Within 90° self-closing door
- *High density foam insulation, thickness 70mm
- *Air flow system for uniform distribution of cooling



FREFF-1208B

FREFF-1208B

FREFF-1208

4 Doors Fancooling Upright Chiller

4 Doors Fancooling Upright Freezer

Dual Temperature Double Split Door Cabinet

Dimension	1220*760*1950mm	1220*760*1950mm	1220*760*1950mm
Capacity	1200L	1200L	1200L
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Power	550W	1000W	1500W
Compressor	Embraco	Embraco	Embraco
Fan	Weiguang	Weiguang	Weiguang
Refrigerant	R134a	R404A	R134a,R404A
Temperature Range	0°C ~8°C	-16°C ~-20°C	0°C ~8°C , -16°C ~-20°C
Cooling Type	Ventilated	Ventilated	Ventilated
Shelves	6	6	6
Net Weight	147kg	158kg	158kg
Gross Weight	162kg	174kg	200kg
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304
Thermostat	Carel	Carel	Carel

*High Density Foam Insulation Thickness 70mm

Asian Series

Undercounter Chiller and Freezer

Available in 2/3/4 Doors
High density foam insulation thickness 60mm



	FREUC-1208A	FREUF-1208A	FREUC-1508A	FREUF-1508A
	2 Doors Fancooling Undercounter Chiller	2 Doors Fancooling Undercounter Freezer	2 Doors Fancooling Undercounter Chiller	2 Doors Fancooling Undercounter Freezer
Dimension	1200*750*855mm	1200*750*855mm	1500*750*855mm	1500*750*855mm
Capacity	290L	290L	350L	350L
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Power	220W	485W	222W	495W
Compressor	Embraco	Embraco	Embraco	Embraco
Fan	Weiguang	Weiguang	Weiguang	Weiguang
Refrigerant	R134a	R404A	R134a	R404A
Temperature Range	0°C ~8°C	-16°C ~-20°C	0°C ~8°C	-16°C ~-20°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	2	2	2	2
Net Weight	87kg	90kg	100kg	107kg
Gross Weight	97kg	100kg	110kg	117kg
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304
Thermostat	Carel	Carel	Carel	Carel

*High Density Foam Insulation Thickness 60mm



- *Stainless steel exterior/interior
- *Stainless steel feet/ castors
- *Rounded inside corners
- *Within 90° self-closing door
- *High density foam insulation, thickness 60mm
- *Air flow system for uniform distribution of cooling



	FREUC-1808A	FREUF-1808A
	3 Doors Fancooling Undercounter Chiller	3 Doors Fancooling Undercounter Freezer
Dimension	1800*750*855mm	1800*750*855mm
Capacity	452L	452L
Voltage	220-240V~50Hz	220-240V~50Hz
Power	260W	505W
Compressor	Embraco	Embraco
Fan	Weiguang	Weiguang
Refrigerant	R134a	R404A
Temperature Range	0°C ~8°C	-16°C ~-20°C
Cooling Type	Ventilated	Ventilated
Shelves	3	3
Net Weight	115kg	115kg
Gross Weight	130kg	130kg
Material	Stainless Steel 304	Stainless Steel 304
Thermostat	Carel	Carel

*High Density Foam Insulation Thickness 60mm



	FREUC-1208B	FREUF-1208B	FREUC-1508B	FREUF-1508B
	2 Glass Doors Fancooling Undercounter Chiller	2 Glass Doors Fancooling Undercounter Freezer	2 Glass Doors Fancooling Undercounter Chiller	2 Glass Doors Fancooling Undercounter Freezer

Dimension	1200*750*855mm	1200*750*855mm	1500*750*855mm	1500*750*855mm
Capacity	290L	290L	350L	350L
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Power	208W	533W	230W	553W
Compressor	Embraco	Embraco	Embraco	Embraco
Fan	Weiguang	Weiguang	Weiguang	Weiguang
Refrigerant	R134a	R404A	R134a	R404A
Temperature Range	0°C ~8°C	-15°C ~-18°C	0°C ~8°C	-15°C ~-18°C
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated
Shelves	2	2	2	2
Net Weight	90kg	93kg	103kg	110kg
Gross Weight	100kg	103kg	113kg	120kg
Material	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304	Stainless Steel 304
Thermostat	Carel	Carel	Carel	Carel

*High Density Foam Insulation Thickness 60mm *With LED Light



- *Stainless steel exterior/interior
- *Stainless steel feet/ castors
- *Rounded inside corners
- *Within 90° self-closing door
- *High density foam insulation, thickness 60mm
- *Air flow system for uniform distribution of cooling



FREUC-1808B

3 Glass Doors Fancooling
Undercounter Chiller

Dimension	1800*750*855mm	1800*750*855mm
Capacity	452L	452L
Voltage	220-240V~50Hz	220-240V~50Hz
Power	268W	580W
Compressor	Embraco	Embraco
Fan	Weiguang	Weiguang
Refrigerant	R134a	R404A
Temperature Range	0°C ~8°C	-15°C ~-18°C
Cooling Type	Ventilated	Ventilated
Shelves	3	3
Net Weight	118kg	127kg
Gross Weight	133kg	142kg
Material	Stainless Steel 304	Stainless Steel 304
Thermostat	Carel	Carel

*High Density Foam Insulation Thickness 60mm *With LED Light

FREUF-1808B

3 Glass Doors Fancooling
Undercounter Freezer

Asian Series

Undercounter Chiller and Freezer

Independent cooling unit, easy maintenance
The glass door allows you to easily see the inside, the heater can effectively to prevent condensation on glass.

